



LELUND

MANUFACTURERS' REPRESENTATIVES

Heating • Ventilation • Air Conditioning Products

STOCK CATALOG

Phone: 630-627-9886
www.lelund.com

Lelund Enterprises, Inc.
1040 N Main St.
Lombard, IL 60148

 **KRUEGER**
Grilles, Registers, Diffusers, & VAV Boxes

 **PENNBARRY**[™]
Exhaust Fans & Gravity Ventilators

BROAN[®]
Bathroom Fans

 **AMERICAN Coolair** 
Exhaust Fans

Lelund Stock Catalog - Table of Contents

Krueger - Grilles, Registers, Diffusers, & VAV Boxes

- 2. Supply Ceiling Diffusers
- 5. Slot Diffusers
- 7. Return Diffusers
- 8. Spiral Registers
- 9. Supply Registers
- 10. Return Grilles
- 12. Accessories
- 15. VAV Boxes

American Coolair - Exhaust Fans

- 16. Downblast Fans
- 18. Upblast Fans
- 19. Inline Fans
- 20. Wall Fans

PennBarry - Exhaust Fans

- 21. Downblast Fans
- 22. Upblast Fans
- 23. Ceiling Exhaust Fans
- 24. Gravity Ventilators

Broan - Exhaust Fans

- 25. Ceiling Exhaust Fans

Canarm - Exhaust Fans

- 26. Inline Fans

- 29. Exhaust Fan Accessories
- 30. Dayus Louvers
- 31. Fire Dampers
- 34. Modine Gas-Fired Unit Heaters
- 35. Line Card

Krueger PLQ: Plaque Supply Diffuser


- One-piece, Non-folded, Square Face Plate
 - Plaque Attaches to a One-piece, Stamped Backpan by Hooks
- Fixed 4-Way Discharge Air Pattern
- Round Neck
- Steel Construction
- British White Finish

Accessories & Options:

- Neck-mounted Damper (PRN100/PR10)
- Plaster Frame (5HCF23)
- Blow Clip
- Aluminum Construction (5PLQ)
- Narrow-T (PLQ F98)

Stock Sizes

<i>Panel Size</i>	<i>Round Neck</i>
24"x24"	6" 8" 10" 12" 14" 15"
12"x12"	6" 8"

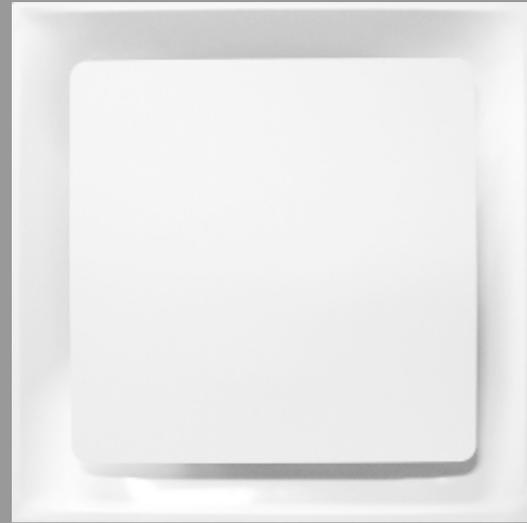
Krueger 1450: Step-Down Supply Diffuser

- 3 Cone Design
 - Drops Below the Ceiling Plane
- Mounting: T-Bar Lay-In
- Fixed 4-Way Discharge Air Pattern
- Round Neck
- Steel Construction
- British White Finish

Accessories & Options:

- Neck-mounted Damper (PRN100/PR10)
- Plaster Frame (5HCF23)
- Aluminum Construction (51450)
- Adjustable (1450A)

Stock Sizes

<i>Panel Size</i>	<i>Round Neck</i>
24"x24"	6" 8" 10" 12" 14"
12"x12"	6" 8"



Krueger SH: Louvered Supply Diffuser

- Flush Louvered Face Diffuser
 - Removable Core
- Mounting: T-Bar Lay-In / Surface Mount
- 4-Way Horizontal Discharge Pattern
- Square Neck
- Steel Construction
- British White Finish

Accessories & Options:

- Neck-mounted Damper (OBDFa)
- Plaster Frame (5HCF23)
- Round Adapters (SRT)
- 1-Way/2-Way/3-Way Cores (SHC)

Stock Sizes

<i>Panel Size</i>	<i>Square Neck</i>
24"x24"	9"x9" 12"x12" 15"x15" 18"x18"
12"x12"	9"x9"
Surface Mount	9"x9" 12"x12" 15"x15"


Krueger 6600: Perforated Supply Diffuser


- Modular Pattern Deflectors
 - Mounted on Back of Face
- Mounting: T-Bar Lay-In
- 4-Way Discharge Air Pattern
 - Adjustable for 1, 2, and 3-way
- Hinged, Removable Face
 - 51% Perforated Open Area
- Round Neck
- Steel Face and Steel Backpan Construction
- British White Finish

Accessories & Options:

- Neck-mounted Damper (PRN100/PR10)
- Plaster Frame (5HCF23)

Stock Sizes

<i>Panel Size</i>	<i>Round Neck</i>
24"x24"	6" 8" 10" 12" 14"
12"x12"	6"

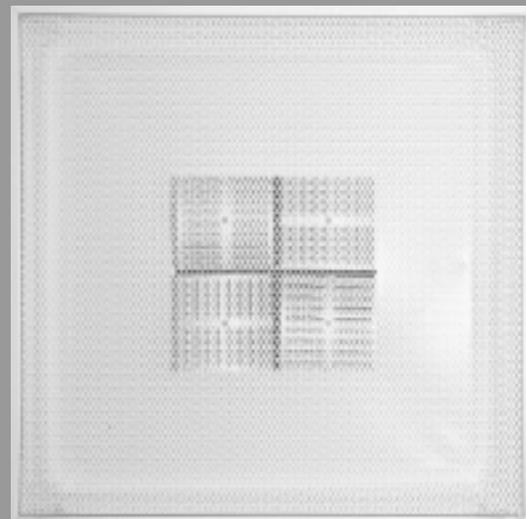

Krueger RM1: Round Supply Diffuser

- 3 Cone Design
- Mounting: Surface Mount
- 360° Discharge Air Pattern
- 2 Position Adjustments
- Round Neck
- Steel Construction
- British White Finish

Accessories & Options:

- Neck-mounted Damper (PRN100/PR10)

Stock Sizes

<i>Panel Size</i>	<i>Round Neck</i>
Surface Mount	6" 8" 10" 12" 14"


Krueger VPQ4: VAV Diffuser

- One-piece, Non-folded, Square Face Plate
 - Plaque Attaches to a One-piece, Stamped Backpan by Hooks
- Fixed 4-Way Discharge Air Pattern
- Thermal Wax Control & Cooling/Heating Change-Over
- Round Neck
- Steel Construction
- British White Finish

Accessories & Options:

- Plaster Frame (5HCF23)

Stock Sizes

<i>Panel Size</i>	<i>Round Neck</i>
24"x24"	6" 8" 10" 12"



Krueger PTBS: Linear Slot Diffuser


- Steel Construction with Gasketed Adjustable Aluminum Blade
- Integral Insulated Plenum for Lay-in T-bar Ceiling Systems
- Oval Inlet Collar
- 2 Slots with 1" Slot Width
- 24" & 48" Length Units
- Center T-Bar
- Black Face and Deflectors (White Tee)

Accessories & Options:

- Plaster Frame (HCFPTBS)
- Center Notch (CN)

Stock Sizes

<i>Length</i>	<i>Oval Inlet</i>
2' Long	6" 8" 10"
4' Long	6" 8" 10" 12"

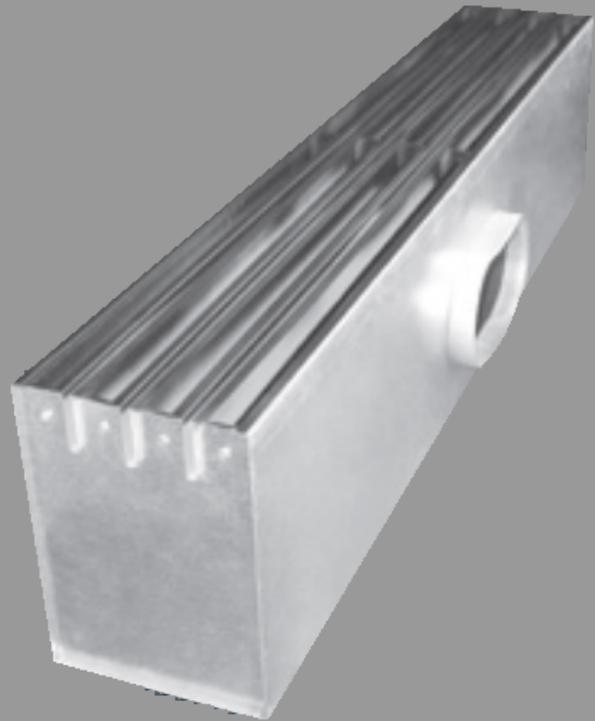

Krueger 1900: Linear Slot Diffuser


- Extruded Aluminum Construction
- Adjustable, Removable Blades
- 2 Slots with 1" Slot Width
- 48" Length Units
- End Caps
- Concealed Fastening
- British White Finish

Accessories & Options:

- Insulated Plenum with Oval Inlet Collar

Stock Sizes

<i>Length</i>
4' Long

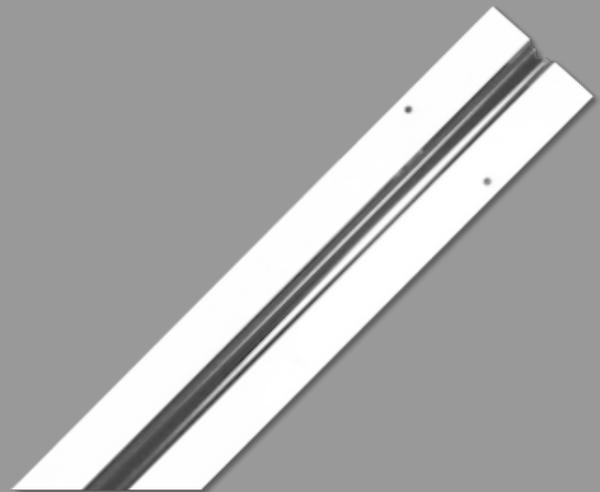
Krueger DFL: Linear Slot Diffuser

- Extruded Aluminum Construction
- Integral Pattern Controllers
- 2 Slots with 1" Slot Width
- 48" Length Units
- End Caps
- Concealed Fastening
- British White Finish

Accessories & Options:

- Insulated Plenum with Oval Inlet Collar

Stock Sizes

<i>Length</i>
4' Long



Krueger S80H: Fixed Blade Return

- Fixed Blade Return Grille
 - 3/4" Spacing with 35° Deflection
 - Horizontal Front Blades
- Mounting: T-Bar Lay-In
- Rectangular Neck
- Steel Construction
- British White Finish

Accessories & Options:

- Neck-mounted Damper (OBD)
- Plaster Frame (5HCF23)
- Round Adapters (SRT)
- Aluminum Construction (S580H)

Stock Sizes

<i>Panel Size</i>	<i>Rectangular Neck</i>
12"x12"	10"x10"
24"x12"	22"x10"
24"x24"	22"x22"
48"x24"	46"x22"


Krueger EGC5: Eggcrate Return


- 1/2"x1/2"x1/2" Eggcrate Grid
- Mounting: T-Bar Lay-In
- Rectangular Neck
- Aluminum Construction
- British White Finish

Accessories & Options:

- Neck-mounted Damper (OBD)
- Plaster Frame (5HCF23)
- Round Adapters (SRT)

Stock Sizes

<i>Panel Size</i>	<i>Rectangular Neck</i>
12"x12"	10"x10"
24"x12"	22"x10"
24"x24"	22"x22"
48"x24"	46"x22"

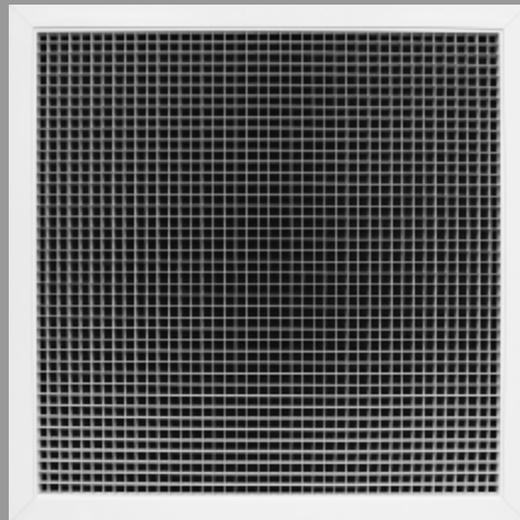

Krueger 6490/6690: Perforated Return


- Hinged, Removable Face
 - 51% Perforated Open Area
- Mounting: T-Bar Lay-In
- Round/Rectangular Neck
- Steel Face and Steel Backpan Construction
- British White Finish

Accessories & Options:

- Neck-mounted Damper (PRN100/PR10/OBD)
- Plaster Frame (5HCF23)

Stock Sizes


Panel Size	Round Neck
24"x24"	6" 8" 10" 12" 14" 16" (6690) 22"x22" (6490)
24"x12"	22"x10" (6490)
12"x12"	6 "(6690) 10"x10" (6490)

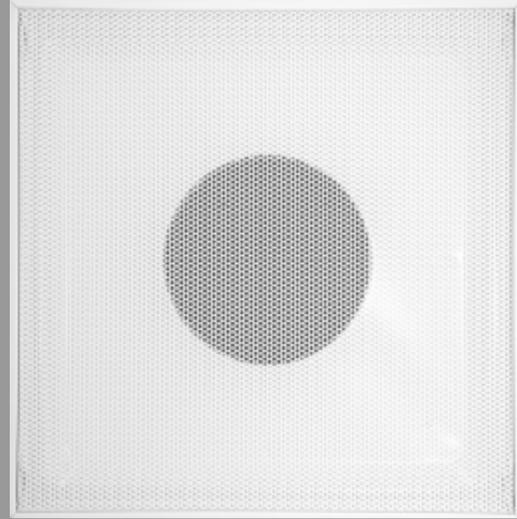

Spiral Supply Registers

Krueger 5DMGDU: Universal-Mount Double-Deflection Spiral Register


- Double-Deflection Supply Registers
 - 3/4" Blade Spacing
 - Adjustable Vertical Front Blades
- Mounting: Spiral Duct Mount
- Air Scoop Damper
- Aluminum Construction
 - Foam Gasket
- Mill finish

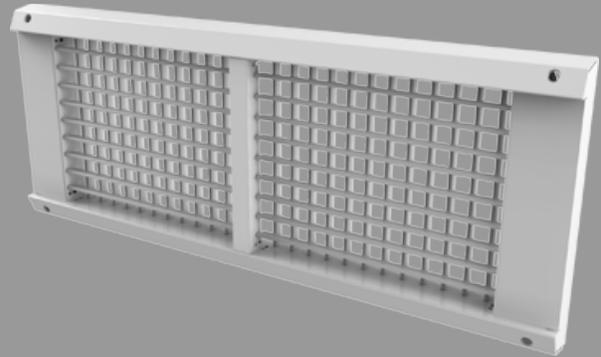

Stock Sizes (Width x Height) - CFM shown is maximum for 35 NC sound level

Width	Height							
	3" (6" - 36" Duct)		4" (10" - 36" Duct)		6" (12" - 36" Duct)		8" (24" - 36" Duct)	
10"	10"x3"	145 CFM						
14"			14"x4"	275 CFM	14"x6"	420 CFM		
18"			18"x4"	345 CFM	18"x6"	525 CFM	18"x8"	695 CFM
24"			24"x4"	450 CFM	24"x6"	680 CFM		

Note: Other sizes also available. Please call to ask us about availability.

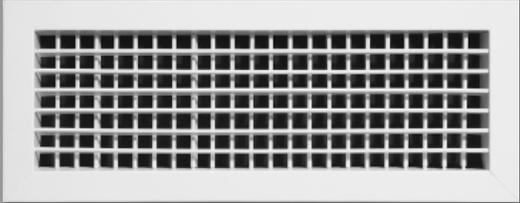Krueger 880VOBD: Double-Deflection Supply Register								
<ul style="list-style-type: none"> • Double-Deflection Supply Registers <ul style="list-style-type: none"> ○ 3/4" Blade Spacing ○ Adjustable Vertical Front Blades • Mounting: Surface Mount • Opposed Blade Damper • Steel Construction • British White Finish 								
Stock Sizes (Width x Height) - CFM shown is maximum for 35 NC sound level								
		Height						
Width	4"		6"		8"		10"	
6"			6"x6"	220 CFM				
8"	8"x4"	195 CFM	8"x6"	295 CFM	8"x8"	390 CFM		
10"	10"x4"	240 CFM	10"x6"	360 CFM	10"x8"	480 CFM	10"x10"	590 CFM
12"	12"x4"	285 CFM	12"x6"	430 CFM	12"x8"	570 CFM	12"x10"	700 CFM
14"			14"x6"	495 CFM	14"x8"	655 CFM	14"x10"	805 CFM
16"			16"x6"	560 CFM	16"x8"	740 CFM	16"x10"	910 CFM
18"			18"x6"	620 CFM	18"x8"	820 CFM	18"x10"	1015 CFM
20"			20"x6"	685 CFM	20"x8"	900 CFM	20"x10"	1115 CFM
22"			22"x6"	745 CFM	22"x8"	985 CFM	22"x10"	1215 CFM
24"			24"x6"	805 CFM	24"x8"	1060 CFM	24"x10"	1310 CFM
30"			30"x6"	980 CFM	30"x8"	1295 CFM		
36"			36"x6"	1150 CFM	36"x8"	1520 CFM	36"x10"	1875 CFM
		Height						
Width	12"		14"		16"		18"	
12"	12"x12"	830 CFM						
14"	14"x12"	955 CFM	14"x14"	1100 CFM				
16"	16"x12"	1080 CFM			16"x16"	1400 CFM		
18"	18"x12"	1200 CFM					18"x18"	1735 CFM
20"					20"x16"	1715 CFM		
22"					22"x16"	1865 CFM		
24"	24"x12"	1550 CFM			24"x16"	2015 CFM	24"x18"	2240 CFM
30"	30"x12"	1890 CFM					30"x18"	2730 CFM
36"	36"x12"	2220 CFM						
		Height						
Width	20"		22"		24"			
20"	20"x20"	2095 CFM						
22"			22"x22"	2485 CFM				
24"					24"x24"	2900 CFM		

Note: Other sizes also available. Please call to ask us about availability.

Krueger S80H: Fixed Blade Return Grille	
<ul style="list-style-type: none"> • Fixed Blade Return Grille <ul style="list-style-type: none"> ○ 3/4" Spacing with 35° Deflection ○ Horizontal Front Blades • Mounting: Surface Mount • Rectangular Neck • Steel Construction • British White Finish 	

Stock Sizes (Width x Height) - CFM shown is maximum for 35 NC sound level								
Height								
Width	4"		6"		8"		10"	
6"			6"x6"	210 CFM				
8"	8"x4"	185 CFM	8"x6"	275 CFM	8"x8"	355 CFM		
10"	10"x4"	225 CFM	10"x6"	335 CFM	10"x8"	435 CFM	10"x10"	530 CFM
12"	12"x4"	265 CFM	12"x6"	390 CFM	12"x8"	510 CFM	12"x10"	620 CFM
14"			14"x6"	450 CFM	14"x8"	580 CFM	14"x10"	705 CFM
16"			16"x6"	500 CFM	16"x8"	650 CFM	16"x10"	790 CFM
18"			18"x6"	555 CFM	18"x8"	720 CFM	18"x10"	875 CFM
20"			20"x6"	605 CFM	20"x8"	785 CFM	20"x10"	955 CFM
22"			22"x6"	655 CFM	22"x8"	850 CFM	22"x10"	1035 CFM
24"			24"x6"	705 CFM	24"x8"	915 CFM	24"x10"	1110 CFM
30"			30"x6"	850 CFM	30"x8"	1100 CFM	30"x10"	1335 CFM
36"			36"x6"	985 CFM	36"x8"	1275 CFM	36"x10"	1555 CFM
Height								
Width	12"		14"		16"		18"	
12"	12"x12"	735 CFM						
14"	14"x12"	825 CFM	14"x14"	945 CFM				
16"	16"x12"	925 CFM			16"x16"	1185 CFM		
18"	18"x12"	1025 CFM					18"x18"	1445 CFM
20"	20"x12"	1120 CFM						
22"	22"x12"	1210 CFM						
24"	24"x12"	1300 CFM	24"x14"	1485 CFM	24"x16"	1660 CFM	24"x18"	1835 CFM
30"	30"x12"	1565 CFM					30"x18"	2205 CFM
36"	36"x12"	1820 CFM			36"x16"	2320 CFM	36"x18"	2565 CFM
48"	48"x12"	2300 CFM						

See next page for continuation


Note: Other sizes also available. Please call to ask us about availability.





Return Grilles

Krueger S80H: Fixed Blade Return Grille								
Stock Sizes (Width x Height) - CFM shown is maximum for 35 NC sound level								
Height								
Width	20"		22"		24"		26"	
20"	20"x20"	1720 CFM						
22"			22"x22"	2020 CFM				
24"	24"x20"	2005 CFM			24"x24"	2330 CFM		
26"							26"x26"	2660 CFM
30"					30"x24"	2805 CFM		
36"					36"x24"	3260 CFM		
42"					42"x24"	3695 CFM		
48"					48"x24"	4120 CFM		
Height								
Width	28"		30"		32"		36"	
28"	28"x28"	3010 CFM						
30"			30"x30"	3370 CFM				
32"					32"x32"	3750 CFM		
36"							36"x36"	4550 CFM
48"							48"x36"	5760 CFM
Height								
Width	42"		48"					
42"	42"x42"	5855 CFM						
48"			48"x48"	7285 CFM				


Note: Other sizes also available. Please call to ask us about availability.

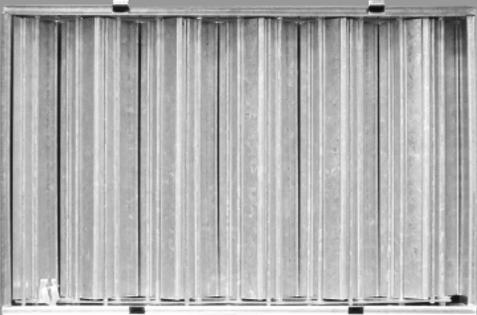Krueger OBD: Rectangular Opposed Blade Damper					
<ul style="list-style-type: none"> ● Rectangular Damper <ul style="list-style-type: none"> ○ Neck-mounted ○ Opposed Blade ○ Attaches with "S" Clips ● Steel Construction ● Operated By Flat-head Screwdriver <p style="text-align: center; margin-top: 10px;">Stock Sizes</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #cccccc;"> <th style="text-align: center; padding: 2px;"><i>Neck Sizes</i></th> </tr> </thead> <tbody> <tr> <td style="text-align: center; padding: 2px;">10"x10"</td> </tr> <tr> <td style="text-align: center; padding: 2px;">22"x10"</td> </tr> <tr> <td style="text-align: center; padding: 2px;">22"x22"</td> </tr> </tbody> </table>	<i>Neck Sizes</i>	10"x10"	22"x10"	22"x22"	
<i>Neck Sizes</i>					
10"x10"					
22"x10"					
22"x22"					

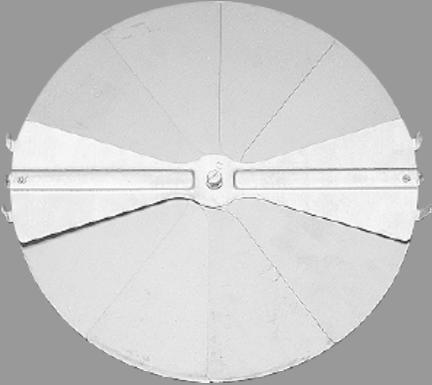Krueger PRN100: Round Sliding Damper			
<ul style="list-style-type: none"> ● Radial Damper <ul style="list-style-type: none"> ○ Neck-mounted ○ Sliding Blade / "Bowtie" style ● Steel Construction ● Operated By Flat-head Screwdriver <p style="text-align: center; margin-top: 10px;">Stock Sizes</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #cccccc;"> <th style="text-align: center; padding: 2px;"><i>Round Sizes</i></th> </tr> </thead> <tbody> <tr> <td style="text-align: center; padding: 2px;">6" 8" 10" 12" 14"</td> </tr> </tbody> </table>	<i>Round Sizes</i>	6" 8" 10" 12" 14"	
<i>Round Sizes</i>			
6" 8" 10" 12" 14"			

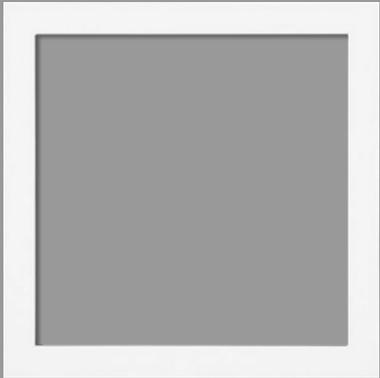Krueger 5HCF23: Plaster Frame						
<ul style="list-style-type: none"> ● Hard Ceiling Frame <ul style="list-style-type: none"> ○ Adapts Lay-in Diffusers for Surface Mounting ● Aluminum Construction ● British White Finish <p style="text-align: center; margin-top: 10px;">Stock Sizes</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #cccccc;"> <th style="text-align: center; padding: 2px;"><i>Panel Size</i></th> </tr> </thead> <tbody> <tr> <td style="text-align: center; padding: 2px;">12"x12"</td> </tr> <tr> <td style="text-align: center; padding: 2px;">24"x12"</td> </tr> <tr> <td style="text-align: center; padding: 2px;">24"x24"</td> </tr> <tr> <td style="text-align: center; padding: 2px;">48"x24"</td> </tr> </tbody> </table>	<i>Panel Size</i>	12"x12"	24"x12"	24"x24"	48"x24"	
<i>Panel Size</i>						
12"x12"						
24"x12"						
24"x24"						
48"x24"						

Hart & Cooley F216: Flex Duct			
<ul style="list-style-type: none"> Metalized polyester jacket reinforced with fiberglass scrim Double-ply, black polyester core 12" W.C. positive, 3/4" W.C. negative (1/2" W.C. neg for 14" - 20" diameter) R-6.0 Insulation UL-listed Boxed in 25' Lengths GREENGUARD Level 4 highly microbial resistant <p><u>Accessories & Options:</u></p> <ul style="list-style-type: none"> Cable Ties <p style="text-align: center;">Stock Sizes</p> <table border="1" style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <thead> <tr style="background-color: #cccccc;"> <th style="padding: 2px 10px;"><i>Duct Diameter</i></th> </tr> </thead> <tbody> <tr> <td style="text-align: center; padding: 2px 10px;">6" 8" 10" 12" 14" 16" 18"</td> </tr> </tbody> </table>	<i>Duct Diameter</i>	6" 8" 10" 12" 14" 16" 18"	
<i>Duct Diameter</i>			
6" 8" 10" 12" 14" 16" 18"			

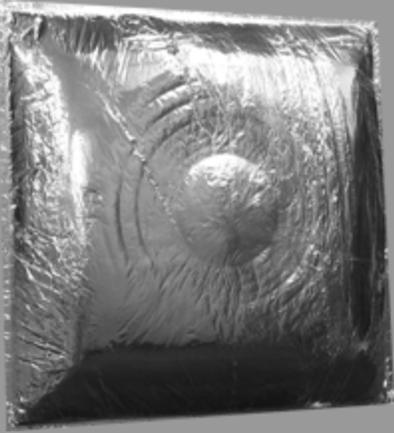AirVector NR6MFG: Fiberglass Backpan			
<ul style="list-style-type: none"> R6 Molded Fiberglass Insulated Backpan Pre-scored for neck sizes 6" to 16" 3.25" deep For 2'x2' Lay-in Diffusers <p style="text-align: center;">Stock Sizes</p> <table border="1" style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <thead> <tr style="background-color: #cccccc;"> <th style="padding: 2px 10px;"><i>Width x Height</i></th> </tr> </thead> <tbody> <tr> <td style="text-align: center; padding: 2px 10px;">22"x22"</td> </tr> </tbody> </table>	<i>Width x Height</i>	22"x22"	
<i>Width x Height</i>			
22"x22"			




Air-Trac SQ/RD: Square to Round Transition (SRT)

- 28 Gauge Galvanized Steel Construction
 - Riveted
 - 3" High Square with 3" Collar
- Accessories & Options:**
- 22"x22" and 22"x10" Transitions Available with Optional Black Painted Finish

Stock Sizes

Bottom Size	Top Size (Round)
6"x6"	4" 5" 6"
8"x8"	6" 8"
9"x9"	6" 8"
10"x10"	4" 6" 8" 10"
12"x12"	4" 6" 8" 10" 12"
14"x14"	10" 12" 14"
15"x15"	6" 8" 10" 12" 14"
18"x18"	10" 12" 14" 16"
22"x10"	6" 8" 10" 12" 14"
22"x22"	6" 8" 10" 12" 14" 16" 18" 20"

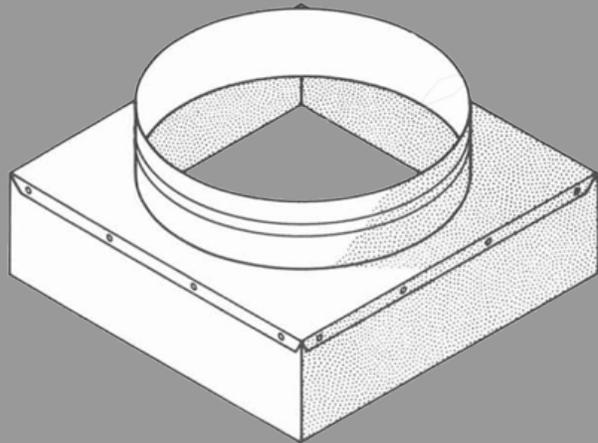


Air-Trac RD/RD: Round to Round Transition (RRT)

- 28 Gauge Galvanized Steel Construction
 - Riveted
- 2" High Collars (Top & Bottom)

Stock Sizes

Bottom Size (Round)	Top Size (Round)
6"	4"
8"	6"
10"	6" 8"
12"	8" 10"
14"	10" 12"
15"	14"

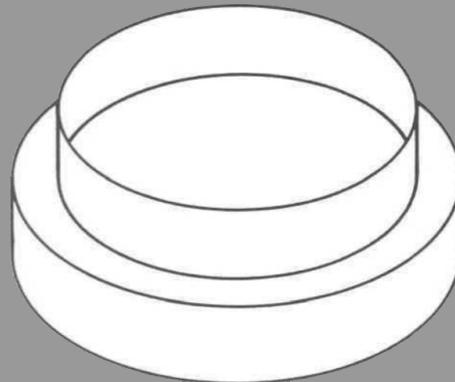



AIR-TRAC[®]


Accessories

Air-Trac LS: Light Shield

- Minimize direct “line of sight” through grille into ceiling plenum
- Block reflected light from ceiling fixtures
- 28 Gauge Galvanized Steel Construction
 - Painted black on bottom
- 4” High

Stock Sizes

Panel Size
24”x24”

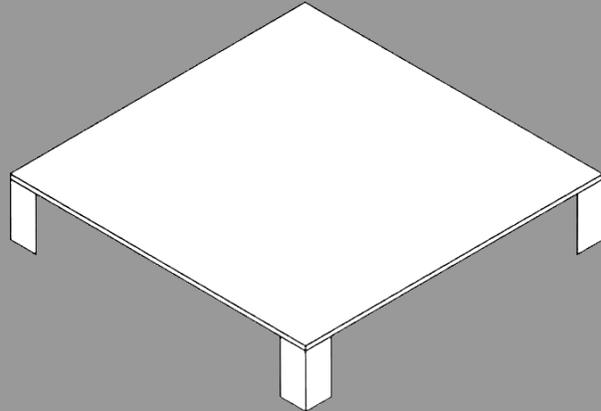

KRUEGER[®]

VAV Boxes

Krueger LMHS: Single Duct Variable Air Volume Terminal Unit


- Single Duct VAV Terminal Units
- 22 Gage Steel Construction
- Round Inlet
- Standard ½” Dual-Density Fiberglass Liner
- Controls Enclosure

Accessories & Options:

- Mounted Controls
 - Pneumatic (Stock Option)
 - Analog
 - Digital
- Thermostats
- Electric or Hot Water Heat
- Various Liners
- Sound Attenuator

Stock Sizes

Inlet Sizes
6” 8” 10” 12” 14”

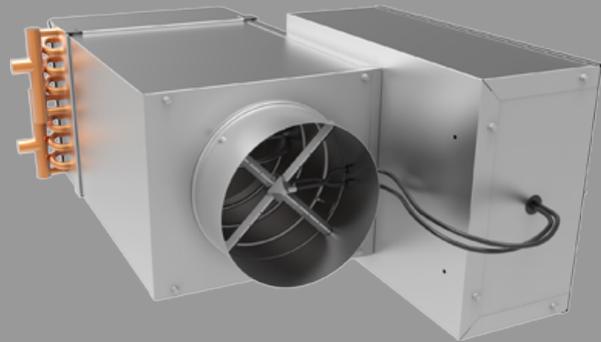


American Coolair CRDA: Direct-Drive Downblast Fans

- Direct-Drive
- Downblast
- Curb-Mounted
- AMCA Licensed for Sound & Air Performance
- UL Listed for Standard 705
- Non-Overloading Aluminum Wheel
- Weatherproof Spun Aluminum Housing

Accessories & Options:

- Bird Screen (Standard)
- Disconnect (Standard)
- Backdraft Damper
 - Motor Kit Option
- Roof Curb
- Speed Controller
 - Varies speed down to 50%
- EC Motors Available

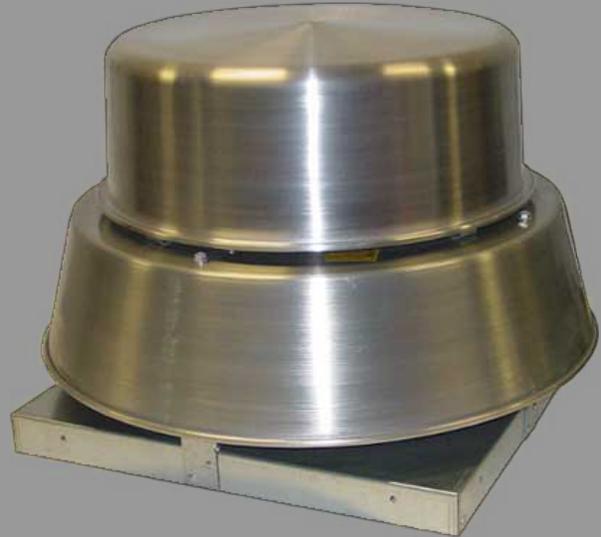

Stock Models

Model	Motor HP	Maximum Performance (CFM)			Base Size	Accessories		
		0.125" w.c.	0.25" w.c.	0.50" w.c.		Damper	Roof Curb	Speed Ctrl
CRDA06C	1/13	459	462	375	18"x18"	12"x12"	17"x17"	2.5 Amp
CRDA10C	1/13	805	752	621	18"x18"	12"x12"	17"x17"	2.5 Amp
CRDA13F	1/5	1622	1527	1319	23"x23"	16"x16"	22"x22"	6 Amp
CRDA15H	1/3	2134	2053	1860	23"x23"	16"x16"	22"x22"	10 Amp

Note: Other models also available. Please call to ask us about availability.

American Coolair CRBCA: Belt-Drive Downblast Fans

- Belt-Drive
- Downblast
- Curb-Mounted
- AMCA Licensed for Sound & Air Performance
- UL Listed for Standard 705
- Non-Overloading Aluminum Wheel
- Weatherproof Spun Aluminum Housing

Accessories & Options:

- Bird Screen (Standard)
- Disconnect Switch (Standard)
- Backdraft Damper
 - Motor Kit Option
- Roof Curb
- Variable Frequency Drives Available



Stock Models

Model	Motor HP	Maximum Performance (CFM)			Base Size	Accessories		
		0.125" w.c.	0.25" w.c.	0.50" w.c.		Damper	Roof Curb	
CRBCA08G	1/4	702	677	631	18"x18"	12"x12"	17"x17"	
CRBCA10G	1/4	934	910	853	18"x18"	12"x12"	17"x17"	
CRBCA13G	1/4	1765	1679	1491	23"x23"	16"x16"	22"x22"	
CRBCA13H	1/3	1986	1911	1748				
CRBCA13J	1/2	2350	2250	2150				
CRBCA13K	3/4	2638	2586	2469	23"x23"	16"x16"	22"x22"	
CRBCA15G	1/4	1990	1897	1697				
CRBCA15H	1/3	2180	2101	1913				
CRBCA15J	1/2	2463	2406	2252				
CRBCA15K	3/4	2820	2782	2469				
CRBCA15L	1	3205	3174	3071	30"x30"	22"x22"	28.5"x28.5"	
CRBCA20J	1/2	3840	3660	3300				
CRBCA20K	3/4	4409	4256	3942				
CRBCA20L	1	4780	4642	4349				
CRBCA20M	1.5	5604	5490	5239				
CRBCA20N	2	6167	6064	5841	34"x34"	26"x26"	32"x32"	
CRBCA24H	1/3	4424	3921	1596				
CRBCA24J	1/2	5290	4836	3851				
CRBCA24K	3/4	6144	5738	4980				
CRBCA24L	1	6868	6507	5812				
CRBCA24M	1.5	8103	7812	7188				
CRBCA24N	2	8927	8672	8098				
CRBCA24P	3	10142	9925	9427				

Note: Other models also available. Please call to ask us about availability.

American Coolair UBCA: Belt-Drive Upblast Fans

- Belt-Drive, Upblast, Curb-Mounted
- AMCA Licensed for Sound & Air Performance
- UL Listed for Standard 705
- Non-Overloading Aluminum Wheel
- Weatherproof Spun Aluminum Housing

Accessories & Options:

- Bird Screen
- Disconnect Switch (Standard)
- Backdraft Damper
 - Motor Kit Option
- Roof Curb
- Variable Frequency Drives Available
- UL762 Rating for Grease Exhaust
- Hinge Kit



Stock Models

Model	Motor HP	Maximum Performance (CFM)			Base Size	Accessories		
		0.125" w.c.	0.25" w.c.	0.50" w.c.		Damper	Roof Curb	
UBCA12G	1/4	1576	1140	1074	26"x26"	18"x18"	23 ³ / ₄ "x23 ³ / ₄ "	
UBCA12H	1/3	1742	1674	1542				
UBCA12J	1/2	1963	1901	1783				
UBCA12K	3/4	2290	2236	2132				
UBCA15H	1/3	2197	2077	1835	26"x26"	18"x18"	23 ³ / ₄ "x23 ³ / ₄ "	
UBCA15J	1/2	2386	2288	2045				
UBCA15K	3/4	2948	2881	2679				
UBCA15L	1	3225	3166	3004				
UBCA18J	1/2	3296	3067	2725	30"x30"	22"x22"	28 ¹ / ₂ "x28 ¹ / ₂ "	
UBCA18K	3/4	3723	3509	3200				
UBCA18L	1	4283	4109	3792				
UBCA18M	1.5	4910	4774	4452				
UBCA20N	2	5465	5351	5054	34"x34"	26"x26"	32"x32"	
UBCA20J	1/2	3812	3580	3185				
UBCA20K	3/4	4397	4189	3383				
UBCA20L	1	4970	4785	4443				
UBCA20M	1.5	5620	5459	5133	34"x34"	26"x26"	32"x32"	
UBCA20N	2	6384	6243	5950				
UBCA24J	1/2	4755	4449	3584				
UBCA24K	3/4	5575	5311	4651				
UBCA24L	1	6132	5895	5348	34"x34"	26"x26"	32"x32"	
UBCA24M	1.5	7012	6810	6383				
UBCA24N	2	7661	7481	7089				
UBCA24P	3	8959	8810	8480				


Note: Other models also available. Please call to ask us about availability.

ACA SQDA/SQBA: Direct-Drive & Belt-Drive Square Inline Fans

- Direct-Drive & Belt-Drive
- Square Inline
- AMCA Licensed for Sound & Air Performance
- UL Listed for Standard 705
- Non-Overloading Aluminum Wheel
- Weatherproof Spun Aluminum Housing

Accessories & Options:

- Drive Guard (Standard for SQBA)
- Disconnect (Standard for SQDA)
- Backdraft Damper
 - Motor Kit Option
- Vibration Isolators (Rubber or Spring)
- Variable Frequency Drives Available

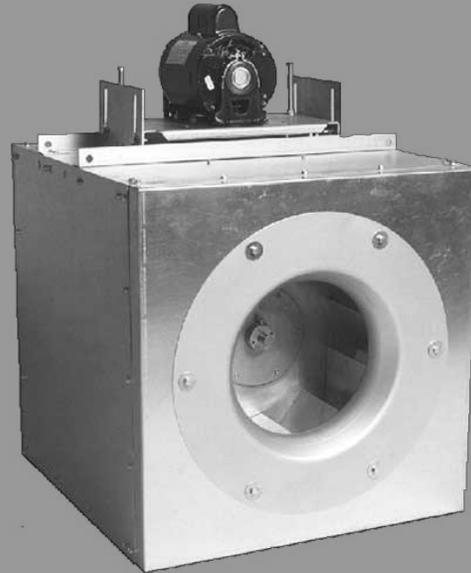

Stock Models

Model	Motor HP	Maximum Performance (CFM)			Inlet/Outlet Size	Accessories		
		0.125" w.c.	0.25" w.c.	0.50" w.c.		Damper	Speed Ctrl	
SQDA10E	1/10	669	618	542	14"x14"	14"x14"	6 Amp	
SQBA10G	1/4	932	901	821	14"x14"	14"x14"	-	
SQBA10H	1/3	1047	1020	957				
SQBA12G	1/4	1326	1265	1115	18"x18"	18"x18"	-	
SQBA12H	1/3	1494	1436	1307				
SQBA12J	1/2	1717	1663	1560				
SQBA12K	3/4	1993	1942	1857	23"x23"	22"x22"	-	
SQBA15H	1/3	2048	1949	1719				
SQBA15J	1/2	2421	2332	2157				
SQBA15K	3/4	2791	2712	2563				
SQBA15L	1	3067	2994	2856	28½"x28½"	28"x28"	-	
SQBA18K	3/4	3646	3535	3303				
SQBA18L	1	4044	3943	3740	30½"x30½"	30"x30"	-	
SQBA18M	1.5	4641	4552	4377				
SQBA20L	1	4786	4620	4302				
SQBA20M	1.5	5621	5478	5200	36½"x36½"	36"x36"	-	
SQBA24M	1.5	7416	7146	6680				
SQBA24N	2	8207	7957	7511				

Note: Other models also available. Please call to ask us about availability.

American Coolair CWDA: Direct-Drive Wall Fans

- Direct-Drive
- Wall-Mounted
- AMCA Licensed for Sound & Air Performance
- UL Listed for Standard 705
- Force Ventilated Motor Compartment
- Non-Overloading Aluminum Wheel
- Weatherproof Spun Aluminum Housing

Accessories & Options:

- Bird Screen (Standard)
- Disconnect (Standard)
- Backdraft Damper
 - Motor Kit Option
- Wall Flange
- Speed Controller
 - Varies speed down to 50%
- EC Motors Available



Stock Models

Model	Motor HP	Maximum Performance (CFM)			Wall Opening	Accessories		
		0.125" w.c.	0.25" w.c.	0.50" w.c.		Damper	Wall Flange	Speed Ctrl
CWDA10C	1/13	783	737	625	10 ³ / ₄ "x10 ³ / ₄ "	12"x12"	WF10	2.5 Amp
CWDA13F	1/5	1463	1372	1182	15 ³ / ₄ "x15 ³ / ₄ "	16"x16"	WF13	6 Amp
CWDA15H	1/3	1952	1862	1636	15 ³ / ₄ "x15 ³ / ₄ "	16"x16"	WF15	10 Amp

Note: Other models also available. Please call to ask us about availability.

PennBarry Domex: Direct-Drive & Belt-Drive Downblast Fans

- Direct-Drive & Belt-Drive
- Downblast
- Curb-Mounted
- AMCA Licensed for Sound & Air Performance
- UL Listed for Standard 705
- Non-Overloading Aluminum Wheel
- Weatherproof Spun Aluminum Housing

Accessories & Options:

- Bird Screen (Standard)
- Disconnect (Standard)
- Backdraft Damper
 - Motor Kit Option
- Roof Curb
- Speed Controller (Direct-Drive Only)
 - Varies speed down to 50%
- EC Motors Available



Stock Models

Model	Motor HP	Maximum Performance (CFM)			Base Size	Accessories		
		0.125" w.c.	0.25" w.c.	0.50" w.c.		Damper	Roof Curb	Speed Ctrl
DX10SR	1/12	501	447	338	18.5"x18.5"	12"x12"	17"x17"	2.5 Amp
DX11VSR	1/6	659	579	432	18.5"x18.5"	12"x12"	17"x17"	2.5 Amp
DX13VSR	1/6	987	923	737	18.5"x18.5"	12"x12"	17"x17"	2.5 Amp
DX13Q	1/4	1226	1170	1053				2.5 Amp
DX16VSR	1/3	2176	2014	1685	20.5"x20.5"	16"x16"	19"x19"	6 Amp
DX16Q1	1/2	2576	2460	2228				10 Amp
DX16Q2	3/4	3015	2825	2665				15 Amp
DX11QGP	1/3 (ECM)	921	850	685	18.5"x18.5"	12"x12"	17"x17"	Integral
DX16RGP	1/3 (ECM)	2176	2013	1689	20.5"x20.5"	16"x16"	19"x19"	Integral
DX16Q1GP	1/2 (ECM)	2579	2464	2228				Integral
DX06B	1/4	635	540	310	18.5"x18.5"	12"x12"	17"x17"	-
DX08B	1/4	940	860	865	18.5"x18.5"	12"x12"	17"x17"	-
DX11B	1/4	1635	1460	1020	20.5"x20.5"	16"x16"	19"x19"	-
DX14B	1/4	2200	1920	1295	24 ³ / ₄ "x24 ³ / ₄ "	24"x24"	23 ³ / ₄ "x23 ³ / ₄ "	-
	1/2	3050	2850	2410				
	3/4	3575	3400	3035				
DX18B	1/2	3860	3540	2800	28.5"x28.5"	20"x20"	27"x27"	-
	3/4	4550	4265	3685				
	1	5085	4825	4315				
	1.5	5925	5690	5245				
DX24B	3/4	5855	5375	4355	33.5"x33.5"	24"x24"	32"x32"	-
	1	6555	6140	5225				
	1.5	7645	7295	6520				
	2	8495	8190	7505				

PennBarry Fumex: Direct-Drive & Belt-Drive Upblast Fans

- Direct-Drive & Belt-Drive
- Upblast
- Curb-Mounted
- AMCA Licensed for Sound & Air Performance
- UL Listed for Standard 705 (UL762 Available)
- Non-Overloading Aluminum Wheel
- Weatherproof Spun Aluminum Housing

Accessories & Options:

- Disconnect (Standard)
- Backdraft Damper
 - Motor Kit Option
- Roof Curb
- Speed Controller (Direct-Drive Only)
 - Varies speed down to 50%
- EC Motors Available



Stock Models

Model	Motor HP	Maximum Performance (CFM)			Base Size	Accessories		
		0.125" w.c.	0.25" w.c.	0.50" w.c.		Damper	Roof Curb	Speed Ctrl
FX10R	1/12	500	441	327	18½"x18½"	16"x16"	17"x17"	2.5 Amp
FX11Q	1/5	961	884	721	18½"x18½"	16"x16"	17"x17"	6 Amp
FX13Q	1/4	1196	1143	1035				6 Amp
FX16R	1/2	1992	1854	1557	20½"x20½"	16"x16"	19"x19"	6 Amp
FX08B	1/4	695	640	505	24¾"x24¾"	16"x16"	23¾"x23¾"	-
	1/2	950	910	820				
FX10B	1/4	1335	1220	985	24¾"x24¾"	16"x16"	23¾"x23¾"	-
	1/2	1825	1740	1565				
FX13B	1/4	1760	1585	1155	24¾"x24¾"	16"x16"	23¾"x23¾"	-
	1/3	1970	1815	1465				
	1/2	-	2285	2020				
FX14B	1/4	-	1860	1200	24¾"x24¾"	16"x16"	23¾"x23¾"	-
	1/3	-	2155	1625				
	1/2	-	2760	2345				
	3/4	-	3300	2940				
	1	-	3715	3395				
FX18B	1.5	4480	4355	4085	28½"x28½"	20"x20"	27"x27"	-
	1/2	-	3385	2735				
	1	-	4620	4130				
	1.5	-	5440	5020				
FX24B	2	-	6085	5705	33½"x33½"	25"x25"	32"x32"	-
	1.5	-	6950	6295				
	2	-	7790	7210				

Note: Other models also available. Please call to ask us about availability.

PennBarry Zephyr: Ceiling Exhaust Fan	
<ul style="list-style-type: none"> Ceiling Exhaust Fans <p>Accessories & Options:</p> <ul style="list-style-type: none"> Speed Controller <ul style="list-style-type: none"> Varies Speed Down to 50% Inline Adapter Wall Cap Roof Cap 	

Stock Models								
Model	Maximum Performance (CFM)			Power (Watts)	Duct Connection	Accessories		
	0.125" w.c.	0.25" w.c.	0.50" w.c.			Speed Controller	Inline Adapter	Other
ZT	88	85	49	48	10"x3¼"	2.5 Amp	-	6" Adapter
Z5H	162	137	22	79	10"x3¼"	2.5 Amp	20722	6" Adapter
ZJ1	171	166	151	125	10"x3¼"	2.5 Amp	-	6" Adapter
Z6H	197	166	-	108	10"x3¼"	2.5 Amp	20722	6" Adapter
Z8H	403	385	348	132	8"x6"	2.5 Amp	20723	
Z10H	693	665	613	390	8"x6"	6 Amp	20724	
Z121S	1072	1025	839	370	22"x6"	6 Amp	20725	
Z12H	1514	1465	1363	851	22"x6"	10 Amp	20725	


Note: Other models also available. Please call to ask us about availability.

PennBarry WCC: Gravity Ventilators

- Curb-Mounted
- Weatherproof Spun Aluminum Housing

Accessories & Options:

- Bird Screen (Standard)
- Backdraft Damper
 - Motor Kit Option
- Counterbalanced Damper
- Roof Curb

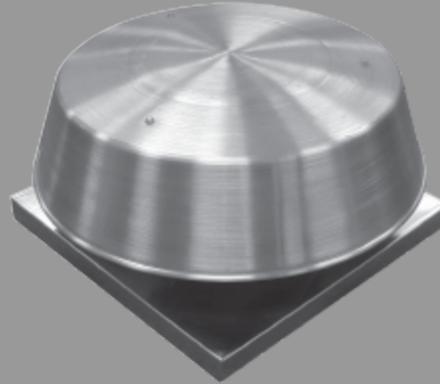

Stock Models

Model	Max. Performance		Throat Diameter	Overall Diameter	Base Size	Accessories		
	Relief @ 0.125" w.c.	Intake at 500 FPM				Damper	Roof Curb	
WCC10	664 CFM	785 CFM	11"	21"	18.5"x18.5"	12"x12"	17"x17"	
WCC12	1102 CFM	1115 CFM	13"	25"	20.5"x20.5"	16"x16"	19"x19"	
WCC16	1668 CFM	1495 CFM	17"	30"	24 ³ / ₄ "x24 ³ / ₄ "	16"x16"	23 ³ / ₄ "x23 ³ / ₄ "	
WCC18	2055 CFM	1625 CFM	19"	32"	28.5"x28.5"	20"x20"	27"x27"	
WCC20	2519 CFM	2275 CFM	21"	37"	28.5"x28.5"	20"x20"	27"x27"	
WCC24	3288 CFM	3435 CFM	25"	45"	33.5"x33.5"	24"x24"	32"x32"	

Note: Other models also available. Please call to ask us about availability.

Broan: Ceiling Exhaust Fans

- Ceiling Exhaust Fans
- **Accessories & Options:**
 - Speed Controller
 - Varies Speed Down to 50%
 - Inline Adapter
 - Wall Cap
 - Roof Cap
 - Light
 - Surface Shield Violet Light
 - Fights growth of bacterial, mold, fungi, etc.
- Energy Star Rating



Stock Models

Model	Maximum Performance (CFM)			Sound at Bolded Perf.	Duct Connection	Accessories		
	0.125" w.c.	0.25" w.c.	0.50" w.c.			Speed Controller	Inline Adapter	Other
L100	109	93	65	0.9 Sones	6" Round	2.5 Amp	961L	-
L150	157	141	124	1.5 Sones	6" Round	2.5 Amp	961L	-
L200	210	196	177	1.7 Sones	8" Round	2.5 Amp	981L	-
L250	259	250	233	2.2 Sones	8" Round	2.5 Amp	981L	-
L300	308	303	287	2.9 Sones	8" Round	2.5 Amp	981L	-
L400	434	388	299	2.3 Sones	4.5"x18.5"	2.5 Amp	982L	-
L500	514	491	434	3.3 Sones	4.5"x18.5"	2.5 Amp	982L	-
L700	701	667	607	4.7 Sones	4.5"x18.5"	6 Amp	982L	-
AR110LKVV	110 @ 0.1"	92	-	1.0 Sones	4" Round	2.5 Amp	-	Surface Shield
670	56 @ 0.1"	46	32	3.5 Sones	3" Round	2.5 Amp	-	-
671	70 @ 0.1"	-	-	6.0 Sones	3" Round	2.5 Amp	-	-
678	50 @ 0.1"	29	-	2.5 Sones	4" Round	2.5 Amp	-	Light
A110	110 @ 0.1"	102	-	3.0 Sones	4" Round	2.5 Amp	-	-
688	50 @ 0.1"	-	-	4.0 Sones	3" Round	2.5 Amp	-	-
AE80B	78 @ 0.1"	58	-	1.2 Sones	4" Round	2.5 Amp	-	Energy Star
XB80	80 @ 0.1"	79	53	<0.3 Sones	6" Round	-	-	Energy Star
XB110	110 @ 0.1"	110	42	<0.3 Sones	6" Round	-	-	Energy Star

Note: Other models also available. Please call to ask us about availability.

Canarm TT: Direct-Drive Turbo Tube Inline Fan

- Direct-Drive Inline Fan
 - Mixed Flow Impeller Wheel
 - 3-Prong Power Cord
 - Plastic Construction
- Accessories & Options:**
- Built-In 2-Speed Control Switch (Standard)
 - Mounting Plate (Standard)


Stock Models

Model	Duct Diameter	Maximum Performance			Energy Star
		0.125" w.c.	0.25" w.c.	0.50" w.c.	
TT150	6"	233	199	78	Yes

Note: Other models also available. Please call to ask us about availability.

Canarm VK: Direct-Drive Inline Fan for High Static Pressure

- Direct-Drive Inline Fan
 - Backward Curved Centrifugal Impeller Wheel
 - 3-Prong Power Cord
 - Plastic Construction
- Accessories & Options:**
- Mounting Bracket (Standard)


Stock Models

Model	Duct Diameter	Maximum Performance						
		0.125" w.c.	0.25" w.c.	0.50" w.c.	0.75" w.c.	1.00" w.c.	1.25" w.c.	1.50" w.c.
VK100	4"	155	147	134	120	104	87	67

Note: Other models also available. Please call to ask us about availability.

Canarm VKM: Direct-Drive Inline Fan for High Static Pressure

- Direct-Drive Inline Fan
- Backward Curved Centrifugal Impeller Wheel
- 3-Prong Power Cord
- Metal Construction

Accessories & Options:

- Mounting Plate (Standard)


Stock Models

Model	Duct Diameter	Maximum Performance						
		0.125" w.c.	0.25" w.c.	0.50" w.c.	0.75" w.c.	1.00" w.c.	1.25" w.c.	1.50" w.c.
VKM150	6"	292	265	214	172	139	107	67
VKM200	8"	502	464	391	320	265	222	183
VKM250	10"	638	599	479	408	340	292	248
VKM305	12"	756	727	669	611	542	480	428


Note: Other models also available. Please call to ask us about availability.

Canarm IDB: Belt-Drive Square Inline Duct Blowers Fans

- Belt-Drive
- Square Inline
- AMCA Licensed for Sound & Air Performance
- UL Listed for Standard 705
- Forward Curved Wheel
- Galvanized Steel Construction


Accessories & Options:

- Disconnect Switch
- Backdraft Damper
 - Motor Kit Option
- Vibration Isolators (Rubber or Spring)
- Variable Frequency Drives Available

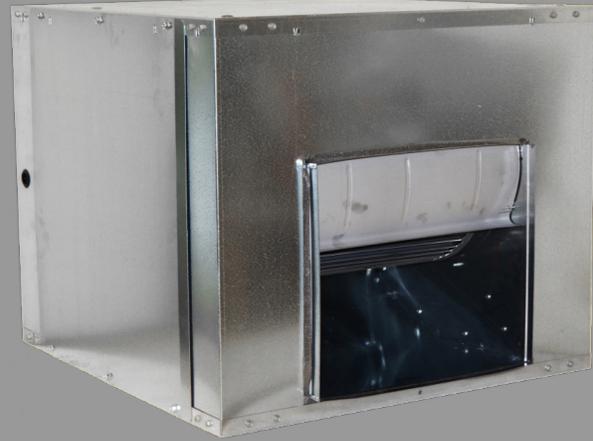
Stock Models

Model	Motor HP	Maximum Performance			Dimensions		
		0.125" w.c.	0.25" w.c.	0.50" w.c.	Inlet	Outlet	
IDB07	1/3	1116	1045	998	15-7/8" x 13-3/8"	8-1/4" x 9-3/16"	
	1/2	1290	1240	1178			
	3/4	1490	1440	1400			
IDB09	1/3	1500	1460	1350	19" x 16"	10-1/4" x 11-13/16"	
	1/2	1750	1710	1615			
	3/4	2000	1965	1400			
IDB10	1/3	1775	1710	1550	20-1/4" x 18"	11-3/8" x 13-1/8"	
	1/2	2070	1995	1880			
	3/4	2395	2315	2210			
IDB12	1/3	2250	2071	1710	25" x 21"	13-7/16" x 15-5/8"	
	1/2	2640	2470	2166			
	3/4	3040	2915	2640			
	1	3370	3260	3010			
	1.5	3875	3790	3570			
IDB15	1/3	2800	2630	1840	30-1/2" x 25"	15-7/8" x 18-5/8"	
	1/2	3250	3135	2420			
	3/4	3740	3660	3315			
	1	4130	4060	3820			
	1.5	4500	4300	4000			
	2	5300	5000	4800			
	3	6300	6000	5800			

Note: Other models also available. Please call to ask us about availability.

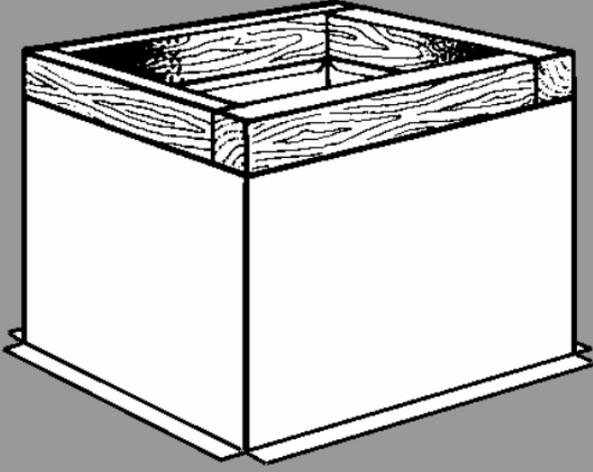Pate pc-2: Roof Curb																															
<ul style="list-style-type: none"> ● Heavy Gauge Galvanized Steel Construction <ul style="list-style-type: none"> ○ Riveted ● 1.5" Thick Rigid Fiberglass Insulation ● Pressure Treated Wood Nailers <p style="text-align: center; margin-top: 10px;">Stock Sizes</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <thead> <tr> <th style="text-align: center;">Outside Dim.</th> <th style="text-align: center;">Inside Dim.</th> <th style="text-align: center;">Height</th> </tr> </thead> <tbody> <tr><td style="text-align: center;">15"x15"</td><td style="text-align: center;">12"x12"</td><td style="text-align: center;">12"</td></tr> <tr><td style="text-align: center;">17"x17"</td><td style="text-align: center;">14"x14"</td><td style="text-align: center;">12" 18"</td></tr> <tr><td style="text-align: center;">19"x19"</td><td style="text-align: center;">16"x16"</td><td style="text-align: center;">12" 18"</td></tr> <tr><td style="text-align: center;">22"x22"</td><td style="text-align: center;">19"x19"</td><td style="text-align: center;">12" 18"</td></tr> <tr><td style="text-align: center;">23³/₄"x23³/₄"</td><td style="text-align: center;">20³/₄"x20³/₄"</td><td style="text-align: center;">12" 18"</td></tr> <tr><td style="text-align: center;">27"x27"</td><td style="text-align: center;">24"x24"</td><td style="text-align: center;">12" 18"</td></tr> <tr><td style="text-align: center;">28¹/₂"x28¹/₂"</td><td style="text-align: center;">25¹/₂"x25¹/₂"</td><td style="text-align: center;">12"</td></tr> <tr><td style="text-align: center;">32"x32"</td><td style="text-align: center;">29"x29"</td><td style="text-align: center;">12"</td></tr> <tr><td style="text-align: center;">35"x35"</td><td style="text-align: center;">32"x32"</td><td style="text-align: center;">12"</td></tr> </tbody> </table>	Outside Dim.	Inside Dim.	Height	15"x15"	12"x12"	12"	17"x17"	14"x14"	12" 18"	19"x19"	16"x16"	12" 18"	22"x22"	19"x19"	12" 18"	23 ³ / ₄ "x23 ³ / ₄ "	20 ³ / ₄ "x20 ³ / ₄ "	12" 18"	27"x27"	24"x24"	12" 18"	28 ¹ / ₂ "x28 ¹ / ₂ "	25 ¹ / ₂ "x25 ¹ / ₂ "	12"	32"x32"	29"x29"	12"	35"x35"	32"x32"	12"	
Outside Dim.	Inside Dim.	Height																													
15"x15"	12"x12"	12"																													
17"x17"	14"x14"	12" 18"																													
19"x19"	16"x16"	12" 18"																													
22"x22"	19"x19"	12" 18"																													
23 ³ / ₄ "x23 ³ / ₄ "	20 ³ / ₄ "x20 ³ / ₄ "	12" 18"																													
27"x27"	24"x24"	12" 18"																													
28 ¹ / ₂ "x28 ¹ / ₂ "	25 ¹ / ₂ "x25 ¹ / ₂ "	12"																													
32"x32"	29"x29"	12"																													
35"x35"	32"x32"	12"																													

ACP 411/611/413: Backdraft Damper																															
<ul style="list-style-type: none"> ● 28 Gauge Galvanized Steel Construction <ul style="list-style-type: none"> ○ Riveted ● 3" High Square with 3" Collar <p style="margin-top: 10px;">Accessories & Options:</p> <ul style="list-style-type: none"> ● 611MTR Motor Kit (24V or 120/240V) <p style="text-align: center; margin-top: 10px;">Stock Sizes</p> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <thead> <tr style="background-color: #cccccc;"> <th colspan="3" style="text-align: center; padding: 2px;"><i>Model 411 (Exhaust/Relief)</i></th> </tr> </thead> <tbody> <tr><td style="text-align: center;">10"x10"</td><td style="text-align: center;">12"x12"</td><td style="text-align: center;">14"x14"</td></tr> <tr><td style="text-align: center;">15"x15"</td><td style="text-align: center;">16"x16"</td><td style="text-align: center;">18"x18"</td></tr> <tr><td style="text-align: center;">20"x20"</td><td style="text-align: center;">22"x22"</td><td style="text-align: center;">24"x24"</td></tr> <tr><td style="text-align: center;">26"x26"</td><td style="text-align: center;">28"x28"</td><td style="text-align: center;">30"x30"</td></tr> <tr style="background-color: #cccccc;"> <th colspan="3" style="text-align: center; padding: 2px;"><i>Model 611 (Exhaust/Relief)</i></th> </tr> <tr><td style="text-align: center;">32"x32"</td><td style="text-align: center;">36"x36"</td><td></td></tr> <tr style="background-color: #cccccc;"> <th colspan="3" style="text-align: center; padding: 2px;"><i>Model 413 (Supply/Intake)</i></th> </tr> <tr><td style="text-align: center;">12"x12"</td><td style="text-align: center;">16"x16"</td><td style="text-align: center;">20"x20"</td></tr> <tr><td style="text-align: center;">25"x25"</td><td></td><td></td></tr> </tbody> </table>	<i>Model 411 (Exhaust/Relief)</i>			10"x10"	12"x12"	14"x14"	15"x15"	16"x16"	18"x18"	20"x20"	22"x22"	24"x24"	26"x26"	28"x28"	30"x30"	<i>Model 611 (Exhaust/Relief)</i>			32"x32"	36"x36"		<i>Model 413 (Supply/Intake)</i>			12"x12"	16"x16"	20"x20"	25"x25"			
<i>Model 411 (Exhaust/Relief)</i>																															
10"x10"	12"x12"	14"x14"																													
15"x15"	16"x16"	18"x18"																													
20"x20"	22"x22"	24"x24"																													
26"x26"	28"x28"	30"x30"																													
<i>Model 611 (Exhaust/Relief)</i>																															
32"x32"	36"x36"																														
<i>Model 413 (Supply/Intake)</i>																															
12"x12"	16"x16"	20"x20"																													
25"x25"																															

Dayus DAL2-FF: Louvers

- Aluminum Construction
- Storm-proof Louvers
- 1" Flange
- Mill Finish

Stock Sizes

<i>Width x Height</i>		
8"x8"	10"x10"	12"x12"
14"x14"	16"x16"	18"x18"
20"x20"	22"x22"	24"x24"
26"x26"	28"x28"	



AireTechnologies 75AH: Rectangular Fire Dampers

- Rectangular Static Fire Dampers
- Type A
 - Curtain Blades in the Airstream
- 1.5 Hour Rated
 - For up to 2 hour fire walls
- Springs
 - Horizontal or Vertical Mounting
- 165°F Fusible Links



Stock Sizes (Width x Height)

Width	Height								
	6"	8"	10"	12"	14"	16"	18"	20"	24"
6"	6"x6"								
8"	8"x6"	8"x8"							
10"	10"x6"	10"x8"	10"x10"						
12"	12"x6"	12"x8"	12"x10"	12"x12"					
14"	14"x6"	14"x8"	14"x10"	14"x12"	14"x14"				
16"	16"x6"	16"x8"	16"x10"	16"x12"	16"x14"	16"x16"			
18"	18"x6"	18"x8"	18"x10"	18"x12"	18"x14"	18"x16"	18"x18"		
20"	20"x6"	20"x8"	20"x10"	20"x12"	20"x14"	20"x16"		20"x20"	
22"	22"x6"	22"x8"	22"x10"	22"x12"	22"x14"	22"x16"			
24"	24"x6"	24"x8"	24"x10"	24"x12"	24"x14"	24"x16"			24"x24"
26"				26"x12"					
28"				28"x12"					
30"						30"x16"			
36"						36"x16"			

Note: Other sizes also available. Please call to ask us about availability.

Fire Dampers

AireTechnologies 75CH: Round Fire Dampers

- Round Static Fire Dampers
- Type C
 - Curtain Blades in the Airstream
- 1.5 Hour Rated
 - For up to 2 hour fire walls
- Springs
 - Horizontal or Vertical Mounting
- 165°F Fusible Links

Stock Sizes

<i>Diameter</i>
6" 8" 10" 12" 14" 16"



Note: Other sizes also available. Please call to ask us about availability.

Fire Dampers

Arrow United R17: True Round Fire Dampers

- True Round Dynamic Fire Dampers
- Curtain Blades
- 1.5 Hour Rated
 - For up to 2 hour fire walls
- Springs
 - Horizontal or Vertical Mounting
- 165°F Fusible Links

Stock Sizes

<i>Diameter</i>
4" 6" 8" 10" 12"




Note: Other sizes also available. Please call to ask us about availability.

AireTechnologies FDC: Rectangular Access Doors

- Square Framed Access Doors
- 24 Gauge Galvanized Steel Construction
- 1" Fiberglass Insulation
- Cam & Latch

Stock Sizes

Width x Height		
6"x6"	8"x8"	10"x10"
12"x12"	14"x14"	16"x16"
18"x18"	20"x20"	24"x24"

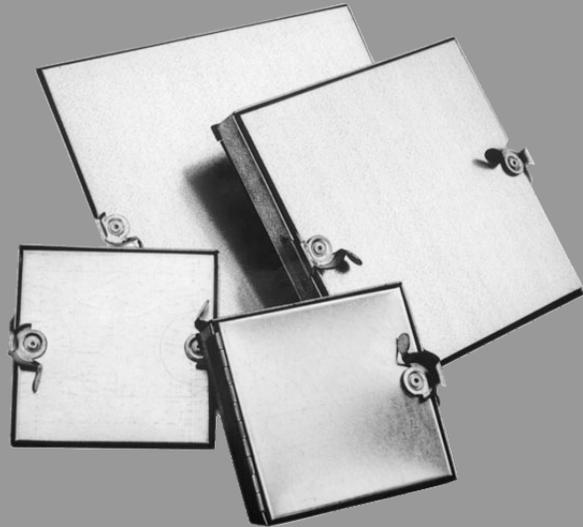

Note: Other sizes also available. Please call to ask us about availability.

AireTechnologies DRU: Access Doors for Spiral Ductwork

- Sandwich Access Doors for Spiral Ductwork
- 22 Gauge Galvanized Steel Construction
- Uninsulated
- Open and Close Without Tools

Stock Sizes

Model	Width X Height	Diameter
DRU846GA	8"x4"	5"-6"
DRU849GA		7"-9"
DRU8411GA		10"-11"
DRU8414GA		12"-14"
DRU12811GA	12"x8"	10"-11"
DRU12814GA		12"-14"
DRU12816GA		15"-16"
DRU12818GA		17"-18"



Note: Other sizes also available. Please call to ask us about availability.

Thermal Blankets

AireTechnologies CTB25: Thermal Blankets			
<ul style="list-style-type: none"> • Ceramic Fiber Thermal Blanket <p style="text-align: center;">Stock Sizes</p> <table border="1" style="margin-left: auto; margin-right: auto; border-collapse: collapse;"> <tr> <td style="text-align: center;"><i>Width x Height</i></td> </tr> <tr> <td style="text-align: center;">24"x24"</td> </tr> </table>	<i>Width x Height</i>	24"x24"	
<i>Width x Height</i>			
24"x24"			



Gas-Fired Unit Heaters

Modine HD: Gas-Fired Unit Heater					
<ul style="list-style-type: none"> • Natural Gas-Fired Unit Heaters • Power Vented <p>Accessories & Options:</p> <ul style="list-style-type: none"> • Thermostat 					
Stock Models					
Model	Motor HP	BTU/hr		Entering CFM	
		Input	Output		
HD30	1/15	30,000	24,000	505	
HD45	1/15	45,000	36,000	720	
HD60	1/12	60,000	48,000	990	
HD75	1/12	100,000	80,000	1160	
HD125	1/8	125,000	100,000	1980	

Note: Other models also available. Please call to ask us about availability.

Brands Lelund Represents and/or Distributes:



PENN BARRY™

Fans



KRUEGER
Excellence in Air Distribution

Grilles, Registers, Diffusers,
VAV



AMERICAN **Coolair**®
ILG
INDUSTRIES

Fans



ABSOLUTAIRE

Make-Up Air Units

AirConcepts Inc.
AIR DISTRIBUTION PRODUCTS

Diffusers



ACP
AIR CONDITIONING PRODUCTS CO.

Backdraft Dampers



AIR MANAGERS

Grilles



AIRIUS®

Destratification Fans



AIR-TRAC®

Square-to-Round Transitions



at
AireTechnologies, Inc.
an HMI company

Fire Dampers & Access Doors



AMERICAN LOUVER COMPANY®
PLASTICADE®

Plastic Diffusers



AQC DUST COLLECTING SYSTEMS

Dust Collection



Arrow United Industries

Louvers & Dampers



BERKO®

Electric Heaters



BROAN®

Ceiling Exhaust Fans

Brands Lelund Represents and/or Distributes:



Fans & Ceiling Fans



Sound Attenuators



Registers & Grilles



Return Grille Sound Boot



Flex Ductwork



Duct Silencers



Control Dampers, VFD's



Hoods & Access Doors



Laundry Exhaust Systems



Kitchen Hoods & Fans



Ceiling Fans



HVLS Fans



Gas Detectors



Electric Heaters



Air Doors

Brands Lelund Represents and/or Distributes:



Heaters, Make-Up Air Units



Garage Ventilation



Electric Duct Heaters



Electric Heaters



Roof Curbs



Fabric Ductwork



Electric Heaters



Electric Heaters



Grilles & Diffusers



Louvers



Louvers & Dampers



Filters



Kitchen Ventilation Systems




VAV Diffusers



Heaters & Circulating Fans

Brands Lelund Represents and/or Distributes:

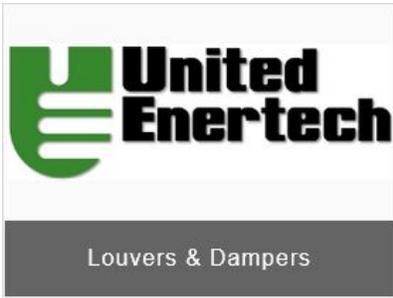

Lelund Enterprises, Inc.

1040 N. Main St.
Lombard, IL
630-627-9886

Hours:

Mon-Thurs - 7am - 5pm
Friday - 7am - 4pm

